



Your solution
PARTNER
for cooling



Intraco

DORBO DOŠLI U INTRACO SVET RASHLADNIH VITRINA








ENG BORNEO BRONZE Series has upwards openable front GLASS (tempered and curved) with damper system is ideal for display and convenience of meat and delicatessen products. All display surfaces are produced with "AISI 304 stainless steel" quality that suited to hygiene standards. Cooling system works with high performance air-circulation system. Internal body is complete 40 kg/m³ density injection polyurethane. That offers wide opportunity of 4 levels of adjustable display basins. There is also multi-functional electronic panel and protector PVC bumper on front panel.


Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltaga Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²
625					59	0,50
937					73	0,75
1250					87	0,99
1875					146	1,47
2500	3	0 / 6°C	230V	50-60Hz	174	1,95
2812					174	2,19
3125					233	2,43
3750					247	2,92
Diş Köşe					110	1,28
İç Köşe					110	0,99

BORNEO BRONZE


Serve Over Cabinet -

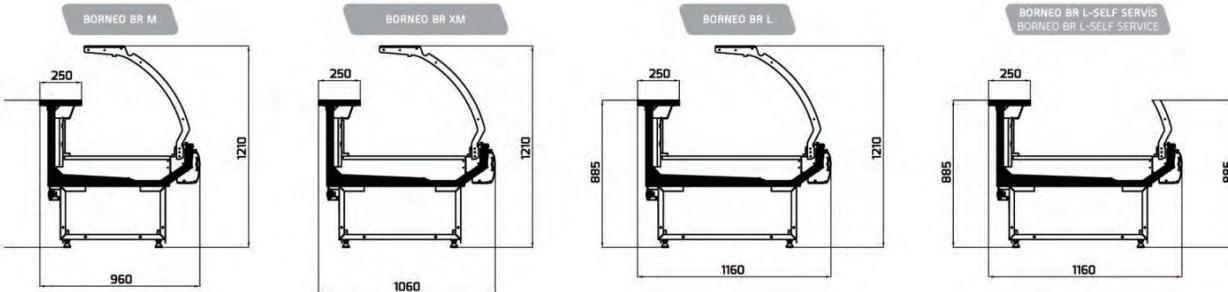

BORNEO L

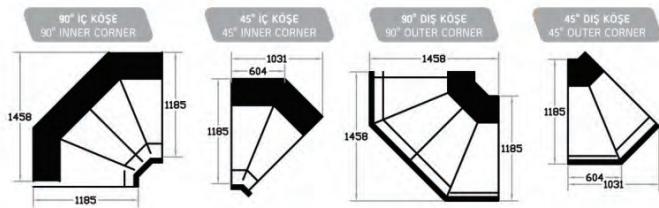

BORNEO M

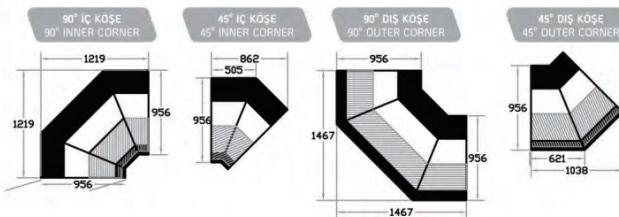



ENG BORNEO GOLD Series has upwards openable front glass (tempered and inclined) with damper system creates a different perspective. BORNEO Gold is ideal for display and convenience of meat and delicatessen products. All display surfaces are produced with "AISI 304 stainless steel" quality that suited to hygiene standards. Cooling system works with high performance air-circulation system. Internal body is complete 40 kg/m³ density injection polyurethane. That offers wide opportunity of 4 levels of adjustable display basins. There is also multi-functional electronic panel and protector PVC bumper on front panel.


Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltaža Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²
625					59	0,50
937					73	0,75
1250					87	0,99
1875					146	1,47
2500	3	0 / 6°C	230V	50-60Hz	174	1,95
2812					174	2,19
3125					233	2,43
3750					247	2,92
Diş Köşe					110	1,28
İç Köşe					110	0,99

25°C / 60% RH (According to EN ISO 23953-2)


BORNEO GOLD
Serve Over Cabinet -




BORNEO GOLD M




BORNEO GOLD XM




BORNEO GOLD L




BORNEO GOLD L - SELF SERVIS
BORNEO GOLD - SELF SERVICE

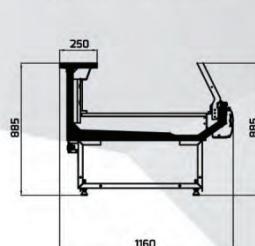


90° İÇ KÖŞE
90° INNER CORNER




45° İÇ KÖŞE
45° INNER CORNER



90° DIŞ KÖŞE
90° OUTER CORNER




45° DIŞ KÖŞE
45° OUTER CORNER













ENG BORNEO PLATINUM Series, which enables the display of delicatessen, meat, ready food and appetizers, is manufactured with air-circulated cooling system. With its 170° opening glass and graded damper, BORNEO Platinum creates simplicity for product placement and with its sharp lines, provides a warm visuality between customer and product. The aesthetic front bar panel, which protects your cabinet from potential damages, at the same time enlarging your display area as an optional.

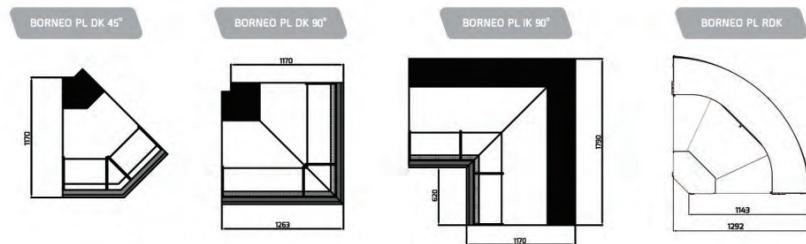


Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltag Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²
625					59	0,50
937					73	0,75
1250					87	0,99
1875					146	1,47
2500	3	0 / 6°C	230V	50-60Hz	174	1,95
2812					174	2,19
3125					233	2,43
3750					247	2,92
Đış Köşe					110	1,28
İç Köşe					110	0,99

25°C / 60% RH (According to EN ISO 23953-2)


BORNEO PLATINUM

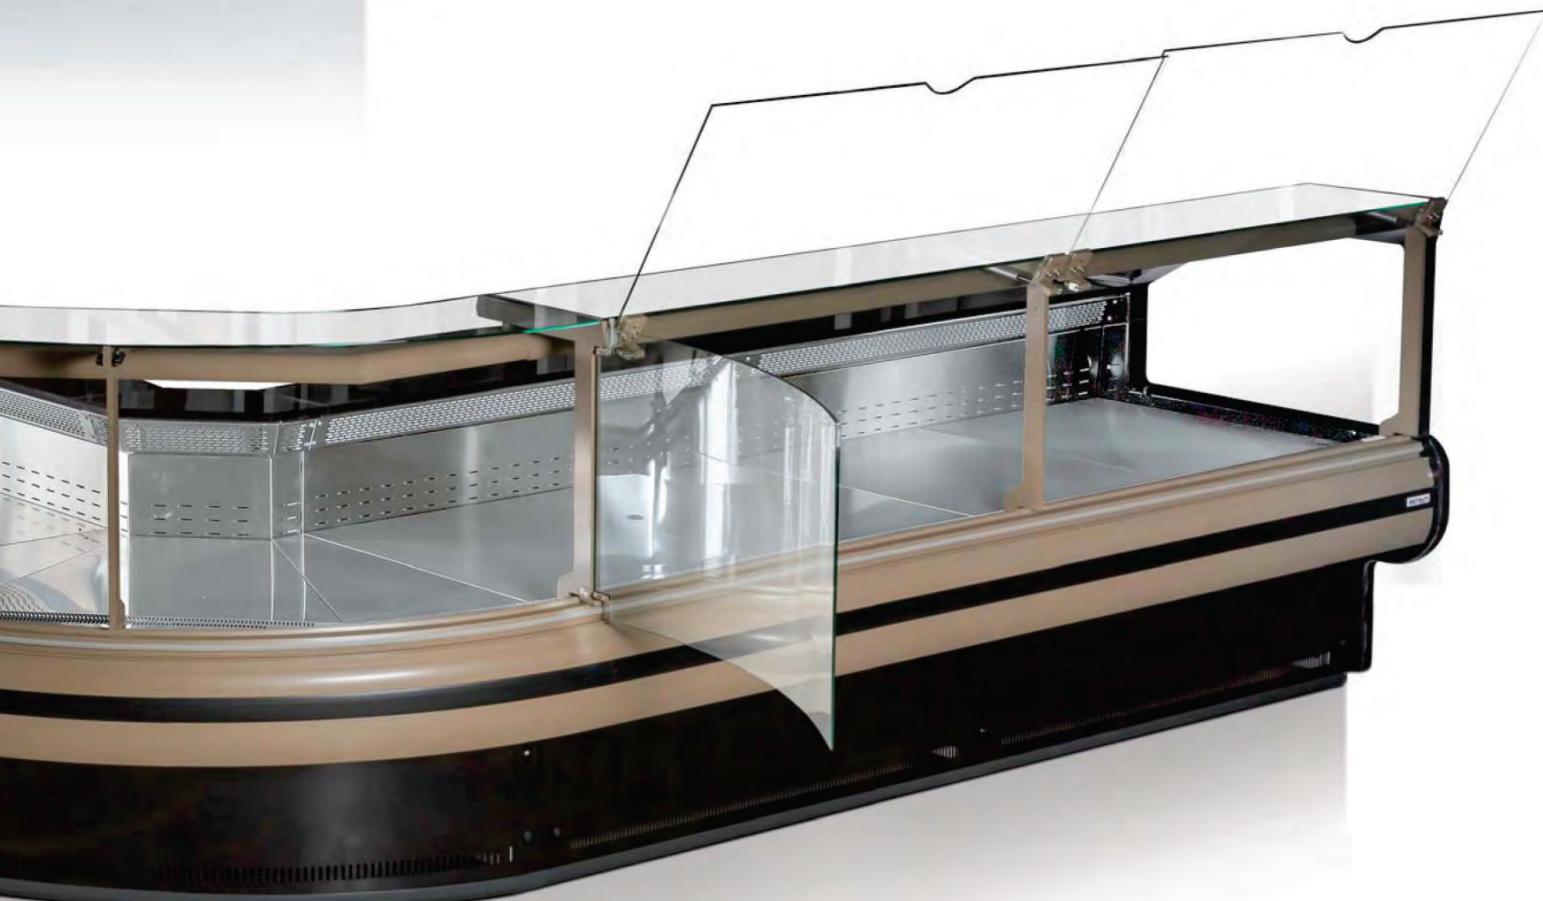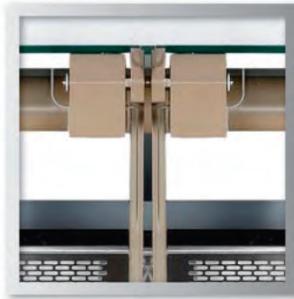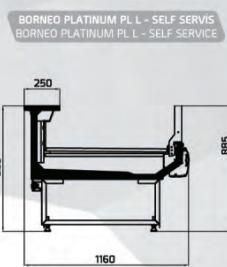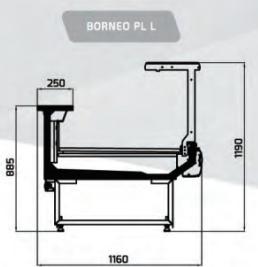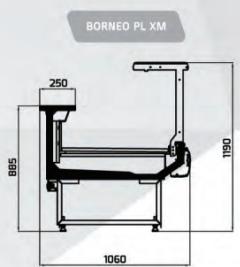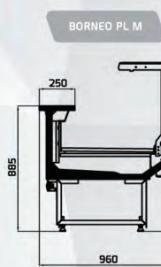

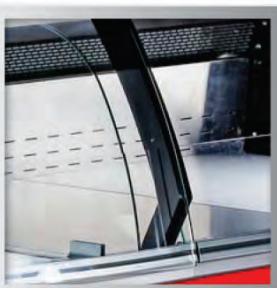

ENG JAVA series offer ergonomic, stylish and peculiarly design with its large internal capacity and extra features. Java is ready to take the special place of your store. Together with the 40 kg/m³ polyurethane body and its round corners, Java displays an image which goes beyond the standards. Opening front rounded front glasses with damper system is ideal for product placement and convenience of meat and delicatessen products. Java modules are designed with spherical aluminum profiles to prevent damages, opportunity of adjustable display basins and multi-functional electronic panel.


Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltaga Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²
625					59	0,50
937					73	0,75
1250					87	0,99
1875					146	1,47
2500	3	0 / 6°C	230V	50-60Hz	174	1,95
2812					174	2,19
3125					233	2,43
3750					247	2,92
Dış Köşe					110	1,28
İç Köşe					110	0,99

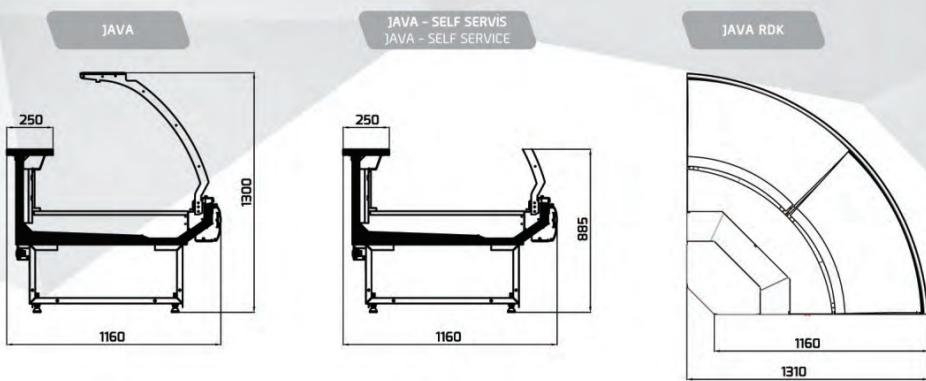



Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltaga Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²
625					59	0,98
937					73	1,46
1250					87	1,95
1875					146	2,93
2500	3	0 / 6°C	230V	50-60Hz	174	3,90
2812					174	4,39
3125					233	4,88
3750					247	5,85

25°C / 60% RH (According to EN ISO 23953-2)

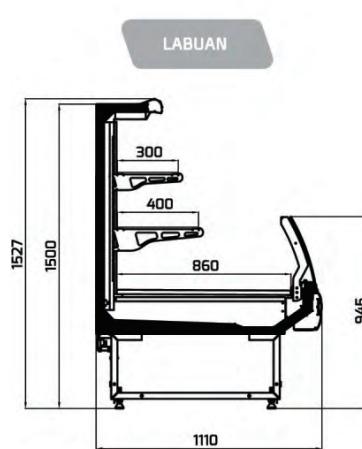


ENG LABUAN Series offer ergonomic, stylish, peculiarly and mountable to service cabinets with its vertical design. Labuan is ready to take the special place of your store. Together with the 40 kg/m³ polyurethane body and optional extra features, Labuan displays an image which goes beyond the standards. Labuan series are designed as remote cabinet models and they never disrupt the integrity of serve cabinets. The multi-functional electronic panel deliveres comfort and easy to use.



ENG SARDINYA: It presents the maximum display capability and offers professional solutions for all kind of dairy products in limited display areas. Refrigerating system is air-circulated and puts forward high performance. Whole body is 40 kg/m³ density injection polyurethane. Base display area and air-suction channel is produced with quality of AISI 304 stainless steel. That offers options of usage by adjustable block shelves. It saves energy with night blind. The multi-functional electronic panel deliveres comfort and easy to use. Additionally, there is a protector PVC bumper on front panel.

Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltag Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²						Nosivost police Shelf Payload Capacity
						S	M	L	HS	HM	HL	
1250					138	2,16	2,30	2,30	2,43	2,57	2,57	
1875					207	3,17	3,36	3,36	5,56	3,76	3,76	
2500					276	3,79	4,05	4,05	4,26	4,52	4,52	
2812					283	4,67	4,96	4,96	5,25	5,54	5,54	125 kg/metre
3125					345	5,36	5,68	5,68	6,03	6,35	6,35	
3750					414	6,17	6,56	6,56	6,94	7,33	7,33	

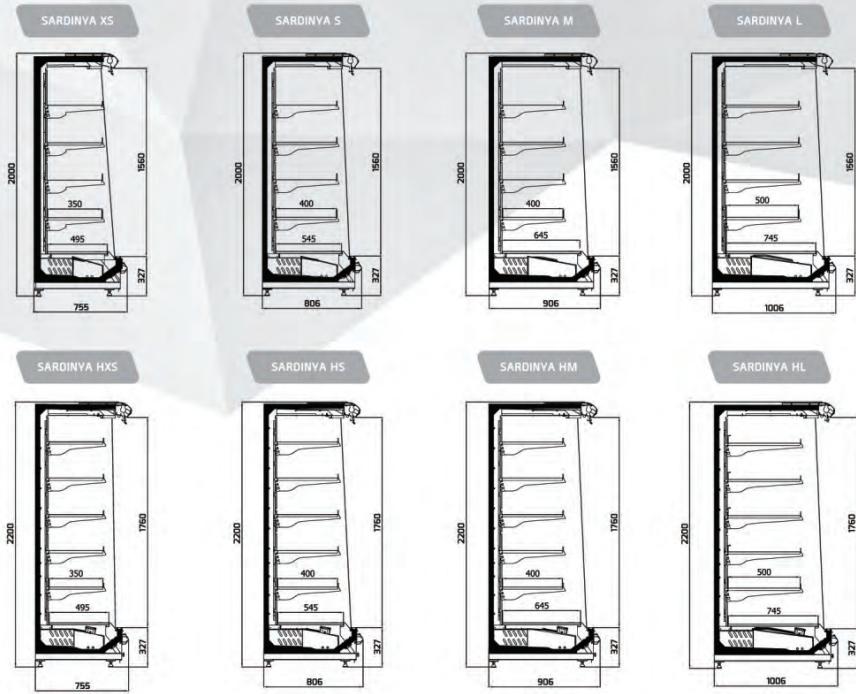



ENG SARDINYA ESD It is designed with swinging and sliding doors, in order to provide highly energy saving. Sardinya E, presents the maximum display capability and offers professional solutions for all kind of dairy and packed meat/chicken products in limited display areas. Refrigerating system is air-circulated and puts forward hight performance. Whole body is 40 kg/m³ densitive injection polyurethane. Base display area and air-suction channel is produced with quality of AISI 304 stainless steel. That offers options of usage by adjustable block shelves. The multi-functional electronic panel deliveres comfort and easy to use. Additionally, there is a protector PVC bumper on front panel.


Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltag Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²						Nosivost police Shelf Payload Capacity
						S	M	L	HS	HM	HL	
1250					138	2,16	2,30	2,30	2,43	2,57	2,57	
1875					207	3,17	3,36	3,36	5,56	3,76	3,76	
2500	3	2 / 6°C	230V	50-60 Hz	276	3,79	4,05	4,05	4,26	4,52	4,52	
2812					283	4,67	4,96	4,96	5,25	5,54	5,54	
3125					345	5,36	5,68	5,68	6,03	6,35	6,35	
3750					414	6,17	6,56	6,56	6,94	7,33	7,33	
												125 kg/metre

25°C / 60% RH (According to EN ISO 23953-2)





ENG BARBADOS: In order you to present various food products with the maximum display capability, Barbados offers professional solutions with open-front and sliding door options. Refrigerating system is air-circulated and puts forward hight performance. Whole body is 40 kg/m³ densitive injection polyurethane. Base display area and air-suction channel is produced with quality of AISI 304 stainless steel. That offers options of usage by adjustable block shelves. That saves energy with night blind. The multi-functional electronic panel deliveres comfort and easy to use. Additionally, there is a protector PVC bumper on front panel.

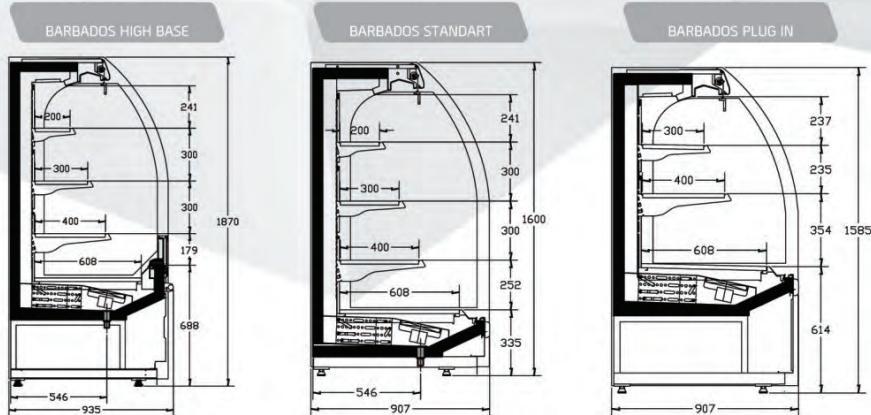

Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltag Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²	Nosivost police Shelf Payload Capacity
1250	3	2 / 6°C	230V	50-60 Hz	138	1,92	125 kg/metre
1875					207	2,80	
2500					276	3,69	
2812					283	4,14	
3125					345	4,58	
3750					414	5,47	



25°C / 60% RH (According to EN ISO 23953-2)




ENG TESELYA It is designed for you to present glass products with the maximum display capability in your food stores and gas stations privately. Refrigerating system is air-circulated and puts forward hight performance. Whole body is 40 kg/m³ densitive injection polyurethane. It offers options of usage by adjustable block shelves. There is a resistant on eloxal aluminium frame that stops the vaporization. The multi-functional electronic panel deliveres comfort and easy to use.

Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltag Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power H:2000 mm H:2200 mm	Ukupna površina Total Display Area m ²	Nosivost police Shelf Payload Capacity
1562 (2K)					356	368	2,66 2,83 2,83 3,00 3,16 3,16
2343 (3K)					522	534	3,92 4,16 4,16 4,40 4,65 4,65
3124 (4K)	3	4 / 10°C	230V	50-60 Hz	729	759	5,36 5,68 5,68 6,03 6,35 6,35
3905 (5K)					834	864	6,17 6,56 6,56 6,94 7,33 7,33

TESELYA


Vertical Glass Door Cabinet -

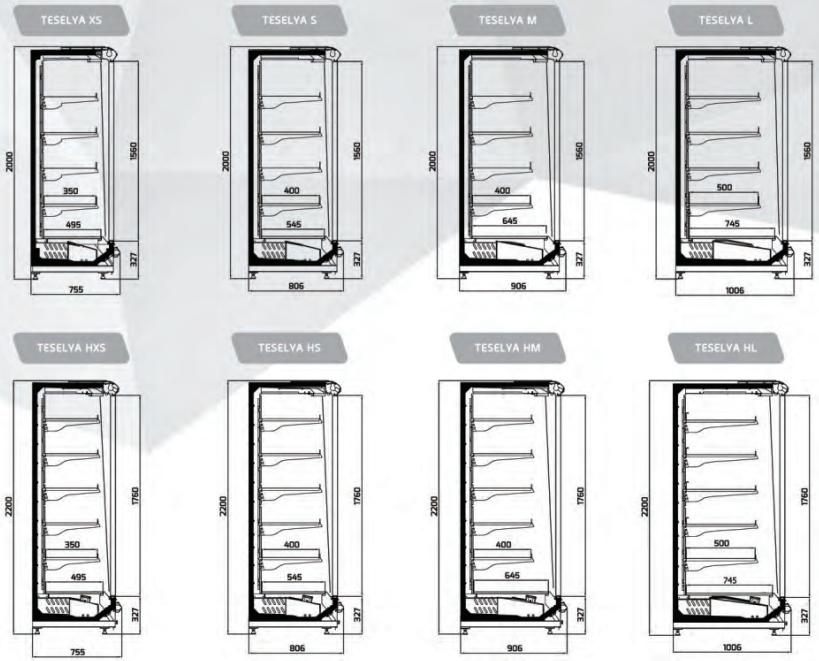



ENG SUMATRA With its high inner capacity, it presents the maximum display capability and offers professional solutions for all kind of packed meat products in limited display areas. Refrigerating system is air-circulated and puts forward hight performance. Whole body is 40 kg/m³ densitive injection polyurethane. Base display area and air-suction channel is produced with quality of AISI 304 stainless steel. It offers options of usage by adjustable block shelves. That saves energy with night blind. The multi-functional electronic panel deliveres comfort and easy to use. Additionally, there is a protector PVC bumper on front panel.

Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltag Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²						Nosivost police Shelf Payload Capacity
						S	M	L	HS	HM	HL	
1250					438	2,23	2,37	2,37	2,50	2,64	2,64	
1875					707	3,27	3,46	3,46	3,66	3,86	3,86	
2500					1026	4,30	4,56	4,56	4,82	5,08	5,08	
2812					1083	4,82	5,11	5,11	5,40	5,69	5,69	125 kg/metre
3125					1195	5,33	5,66	5,66	5,98	6,30	6,30	
3750					1414	6,37	6,75	6,75	7,14	7,52	7,52	

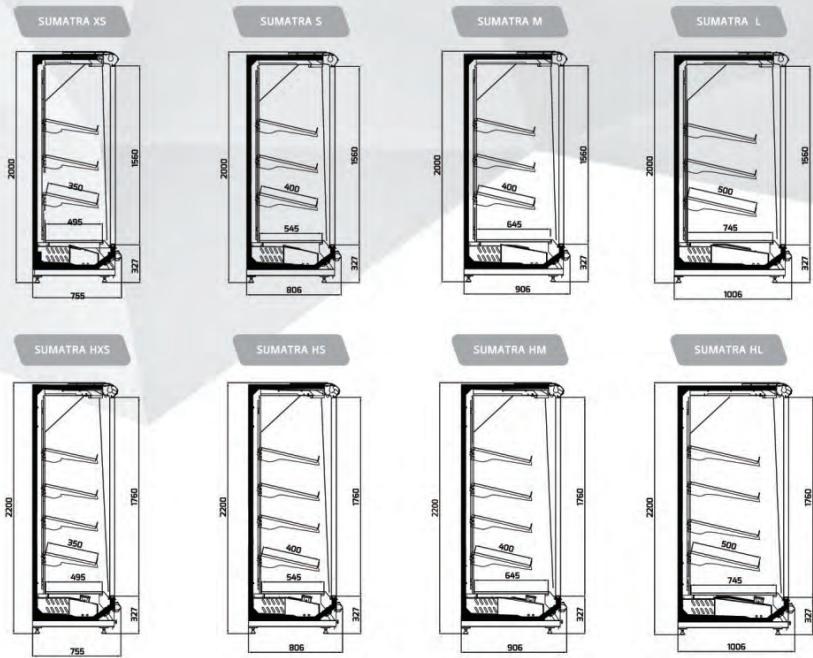




ENG SUNDA With its high inner capacity, it presents the maximum display capability and offers professional solutions for all kind of fruits and vegetables in limited display areas. Refrigerating system is air-circulated and puts forward hight performance. Whole body is 40 kg/m³ densitive injection polyurethane. Base display area and air-suction channel is produced with quality of AISI 304 stainless steel. That offers options of usage by adjustable block shelves. The multi-functional electronic panel deliveres comfort and easy to use. Additionally, there is a protector PVC bumper on front panel.

Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltag Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²						Nosivost police Shelf Payload Capacity
						S	M	L	HS	HM	HL	
1250					138	2,15	2,29	2,29	2,42	2,56	2,56	
1875					207	3,15	3,35	3,35	3,55	3,74	3,74	
2500	3	4 / 10°C	230V	50-60 Hz	276	4,15	4,41	4,41	4,67	4,93	4,93	125 kg/metre
2812					283	4,65	4,94	4,94	5,23	5,52	5,52	
3125					345	5,15	5,47	547	5,79	6,11	6,11	
3750					414	6,14	6,53	6,53	6,91	7,30	7,30	

25°C / 60% RH (According to EN ISO 23953-2)

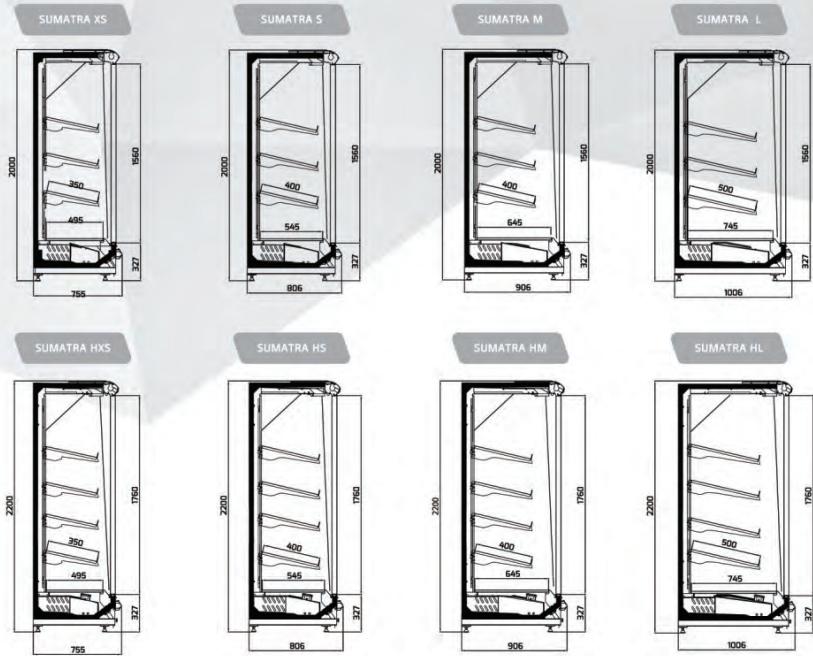

SUNDA SILVER

Fruit & Vegetable Cabinet -



ENG SUNDA SILVER With its developed aesthetic design, it presents the maximum display capability and offers professional solutions for all kind of fruits and vegetables in limited display areas. Refrigerating system is air-circulated and puts forward hight performance. Whole body is 40 kg/m³ densitive injection polyurethane. Base display area and air-suction channel is produced with quality of AISI 304 stainless steel. That offers options of usage by adjustable block shelves. The Multi-functional electronic panel deliveres comfort and easy to use. Additionally, there is a protector PVC bumper on front panel.


Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltag Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²	Nosivost police Shelf Payload Capacity
1250					138	1,80	
1875					207	2,71	
2500					276	3,61	
2812					283	4,06	
3125					345	4,51	
3750					414	5,42	
							125 kg/metre

25°C / 60% RH (According to EN ISO 23953-2)

SUNDA SILVER

Fruit & Vegetable Cabinet-



SUNDA SILVER

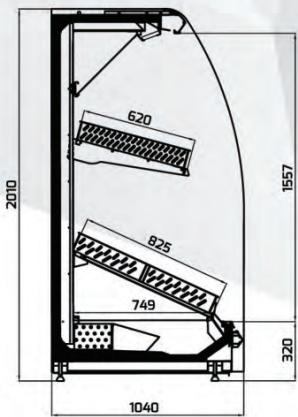




ENG MARACA With its high inner capacity, it presents the maximum display capability and offers professional solutions for all kind of frozen products, in limited display areas. Refrigerating system is air-circulated and puts forward hight performance. Whole body is 40 kg/ m³ densitive injection polyurethane. It offers options of usage by adjustable block shelves. There is a resistant on eloxal aluminium frame that stops the vaporization. The multi-functional electronic panel deliveres comfort and easy to use.

Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltag Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power H:2050 mm H:2250 mm	Ukupna površina Total Display Area m ²	Nosivost police Shelf Payload Capacity
1562 (2K)					2210	2114	1,69
2343 (3K)					3336	3342	2,53
3124 (4K)	3L1	-18 / -22 °C	230V	50-60 Hz	4152	4160	3,38
3905 (5K)					5088	5098	4,22
							125 kg/metre

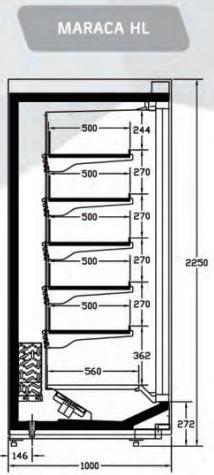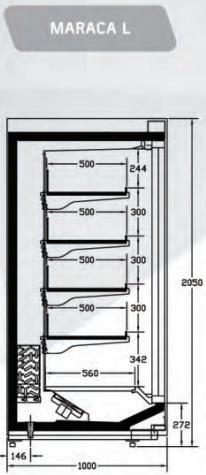



SAMOS

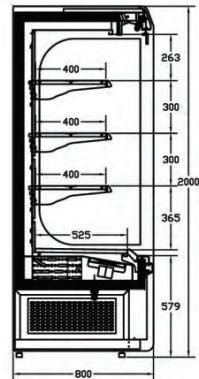


ENG SAMOS It is ideal for displaying dairy products, packaged meat and fruit&vegetables. Cooling unit (motor, fan, condenser etc..) is placed under the cabinet. Refrigerating system is air-circulated and puts forward hight performance. Whole body is 40 kg/m³ densitive injection polyurethane. That offers options of usage by adjustable block shelves. That saves energy with night blind. The Multi-functional electronic panel deliveres comfort and easy to use. Additionally, there is a protector PVC bumper on front panel

Duzina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltag Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area m ²	Nosivost police Shelf Payload Capacity
937					972	1,61	
1250					1178	1,92	
1875	3	2 / 6°C	230V	50-60 Hz	1828	2,80	
2500					2356	3,69	125 kg/metre

25°C / 60% RH (According to EN ISO 23953-2)



BARBUDA PLUG-IN

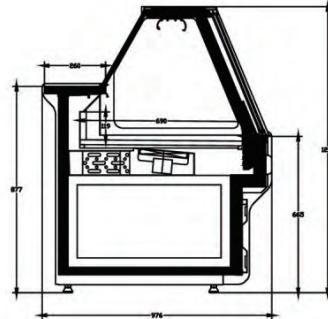


ENG BARBUDA is designed ergonomically for convenience of meat and delicatessen products in small scale stores. The cooling system is placed under the body (motor, condenser etc.) and refrigerated storage is available. Cooling system works with high performance air-circulation system. Internal body is complete 40 kg/m³ density injection polyurethane. That offers wide opportunity of 4 levels of adjustable display basins. There is also a multi-functional electronic panel and a protector PVC bumper on front panel.

Duzina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltag Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area (TTA) m ²
1250					776	0,74
1875	3	0 / 6°C	230V	50-60Hz	857	1,10
2500					1091	1,46

25°C / 60% RH (According to EN ISO 23953-2)



PHUKET İÇ MONTAJ PROMOSYON DOLABI
PHUKET PLUG-IN PROMOTION CABINET

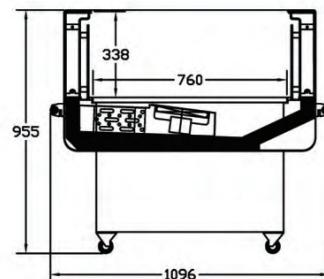

ENG PHUKET is fan assisted plug-in display case with rigid wheels for quick sale and circulation of the special products. With the help of its wheels, it can be easily moved and used for promotional goals. Polyurethane body is made the refrigeration part of the case isolated in best way. Transparent, tough division of the case is made of Plexiglas. This cabinet is controlled by an electronic digital control system and has also evaporation vessel that evaporates the accumulated water inside the case. The body is covered by aluminum bumper to prevent the damage.

Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp	Radna voltaga Working Voltage	Radna frekvencija Working Frequency	Snaga napajanja Supply Power	Ukupna površina Total Display Area (TTA) m ²
1108	3	4 / 6°C	230V	50-60Hz	619	0,75
1420						0,98




DEEP FREEZER		Paris 185 (-)	Paris 210 (-)	Paris 250 (-)
Gross Volume	lt	785	910	1104
Net Volume	lt	625	724	882
Operating Temperature	C	-18 ile -23	-18 ile -23	-18 ile -23
Energy Consumption	kWh/24h	8,3	8,2	8,7
Refrigerating Fluid		R404A	R404A	R404A
Overall-Internal Length	mm	1854-1720	2502 / 2370	2502 / 2370
Overall-Internal Depth	mm	853 / 720	853 / 720	853 / 720
Front-Back Height	mm	770 / 833	770 / 833	770 / 833
Net Weight	kg	112	145	145
Gross Weight	kg	122	156	156




ISO 9001:2008



BERMUDA-44

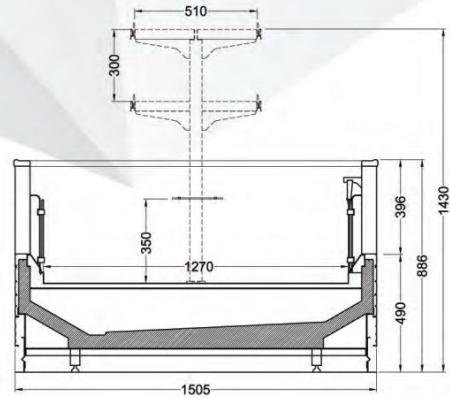


BERMUDA-11

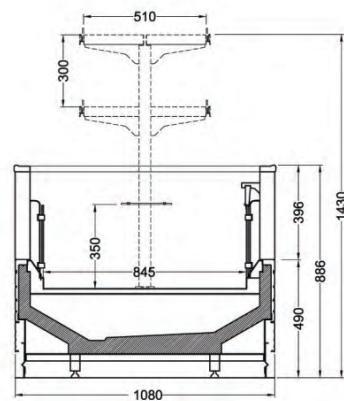


IBIZA H197

Combi Deepfreezer

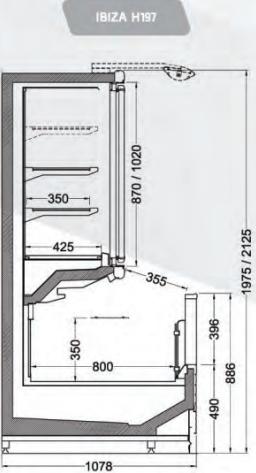

Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp
2500	3	-18 / -22°C
3750		

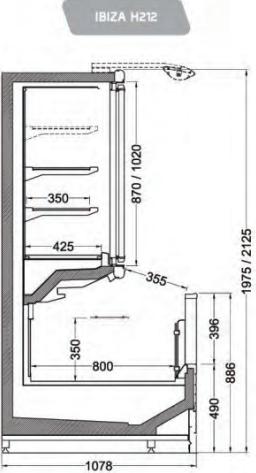



IBIZA H212

Combi Deepfreezer






RHODES 11

Island Type Deepfreezer

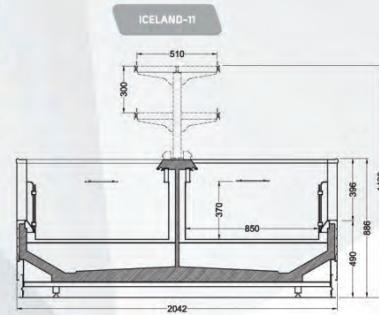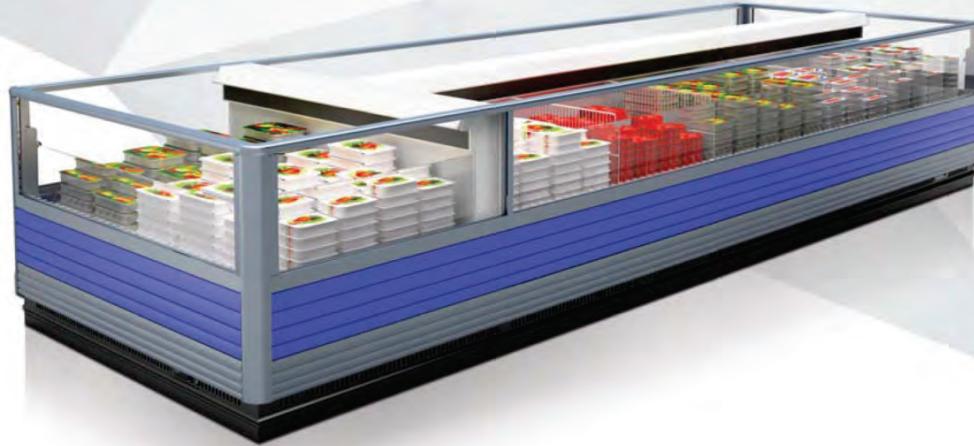

Dužina modela Module Length	Klimatska klasa Climate Class	Radna temperatura Working Temp
1875		
2500	3	
3750		-18 / -22°C

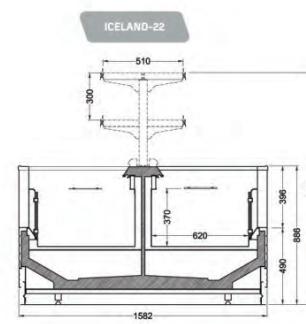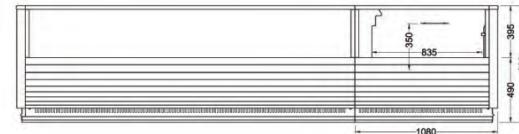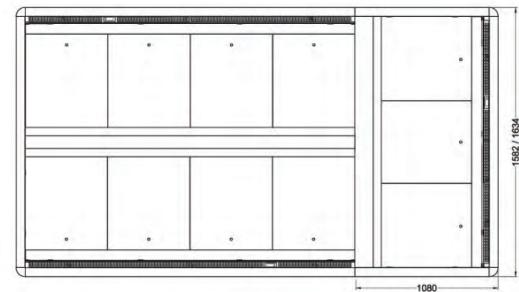

RHODES 22

Island Type Deepfreezer

ARS



FRT



DCL



ENG Refrigerating Units are designed in 3 categories which are: hermetic, semi-hermetic and scroll compressors. Their capacities are defined according to the projects and are designed specifically. They are used very commonly in hypermarkets, supermarkets and coldrooms especially, thanks to their low energy consumption and high efficiency skills. The refrigerating units have control panels with sight glasses for monitoring the control equipments. The units are also compatible with CE standards and we despatch them as nitrogen charged.



COLD ROOMS

Industrial Cold Rooms




Ceiling Type Standard Evaporator



Low Flow-Rate Evaporator



APPLICATIONS

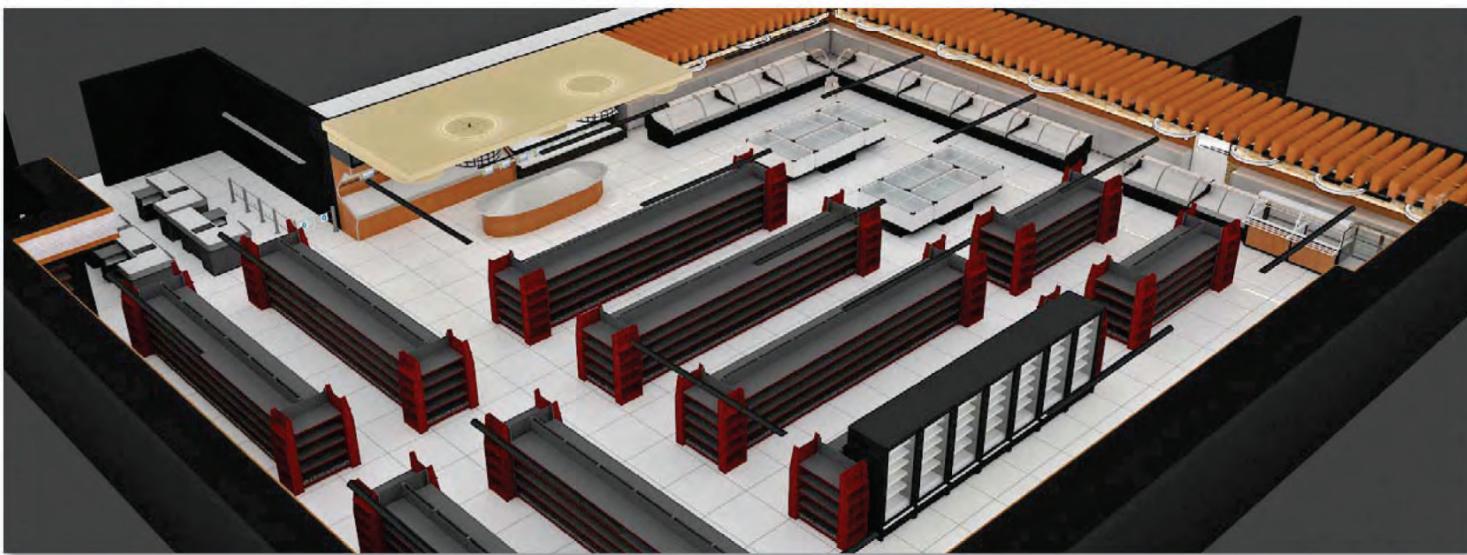



APPLICATIONS







APPLICATIONS



ISO 9001:2008

APPLICATIONS

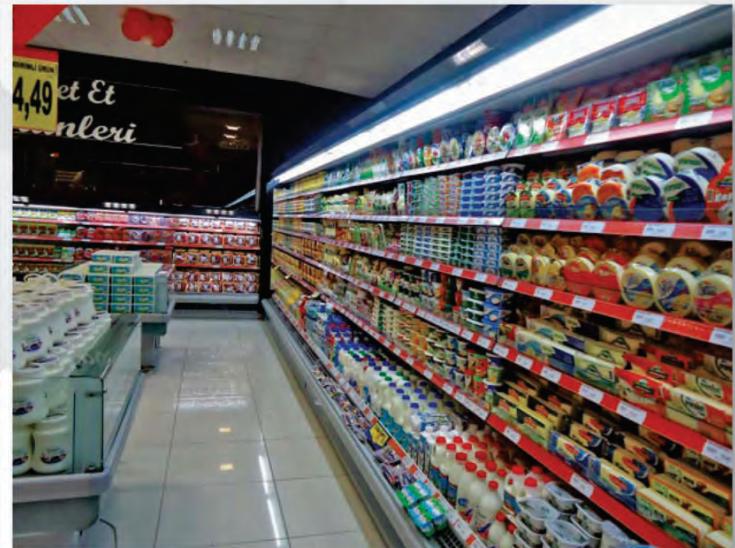

Ral 9003



Ral 9001



Ral 7040



Ral 5002



Ral 3020



Ral 2004



Ral 1021



Ral 6018



Ral 7024



Ral 9005



ISO 9001:2008

